

THREADED BALL STUD™



One of the most useful accessories in the Pipe & Base 2.0® lineup, Threaded Ball Studs™ allow users to connect a variety of elements to the Pipe & Base 2.0® system.

For example, attach Threaded Ball Studs™ to standard frame screens that use 5/16" x 18 course threaded inserts, and simply hang the screen from the drape line. No more “bailing wire and bubble gum,” this product provides a secure and stable connection using the Pipe & Base 2.0® Crowns™ from Versatop Support Systems, LLC.

Use the Threaded Ball Studs™ with standard threaded inserts from any hardware store to secure flats, signs, and other decorative elements to your set.




Threaded Ball Stud™
Patent No.: US 9,211,027 B2



VERSATOP 3245 East Patrick Lane Suite G • Las Vegas, NV 89120
SUPPORT SYSTEMS (p): 702-982-3311 • sales@versatop.com • www.versatop.com

THREADED BALL STUD™

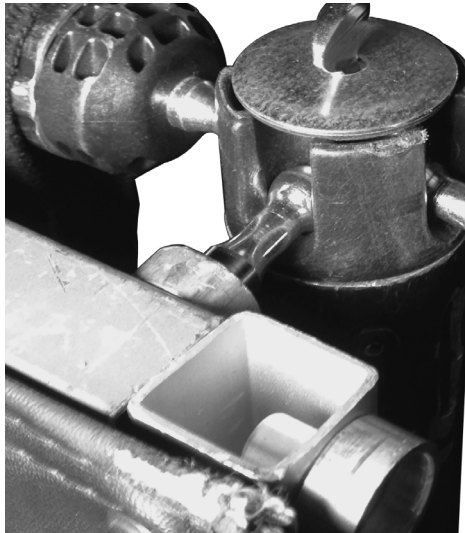

Threaded Ball Stud™ shown attached to a frame screen & secured on a Pipe & Base 2.0® Upright



Threaded Ball Stud™
Patent No.: US 9,211,027 B2

SPECIFICATIONS:

PART NUMBER:	112-0100001
Fits:	Standard frame screens that use 5/16" x 18 course threaded inserts
Composition:	Cold Rolled 12L14 Steel - Clear Zinc Coated
Weight:	2.4 oz
Length:	2 in Overall
Width:	.5 In
Threading A:	5/16" X 18 Threads Per Inch (course thread)
Lateral Socket Articulation:	NA
Vertical Socket Articulation:	NA
Operating Temperature Range:	(-)30 deg F - (+)150 deg F

Supported Weight Limit: Total MAXIMUM weight limit for each properly installed Threaded Ball Stud is 20 LBS when used with properly installed uprights fitted with Pipe & Base 2.0® Crowns™ that are properly attached to the upright. Uprights must be installed with appropriate ballast for the total weight supported.

MAXIMUM screen weight must be below maximum allowable weight of properly installed Threaded Ball Studs * Never exceed listed maximum weight limits. If using Versatop Support Systems components with components from other manufacturers, user should consult the manufacturers operating instructions for limitations. Limits for uprights or cross bars may be much lower than the limits for the Threaded Ball Stud™ and Crown™. Always adhere to the safe weight limits provided by the pipe hardware manufacturer.

Threaded Ball Stud Usage: Threaded Ball Studs™ are provided for practical use to attach screen frames and other hardware to Versatop Support Systems Pipe & Base 2.0® products within the weight limits posted above. Usage for purposes other than approved by Versatop Support Systems is at users own risk.



VERSATOP™
SUPPORT SYSTEMS

3245 East Patrick Lane Suite G • Las Vegas, NV 89120
(p): 702-982-3311 • sales@versatop.com • www.versatop.com